

IS-DG308-A Series

8-port Gigabit Unmanaged Layer 2 Industrial Ethernet Switch



The IS-DG308-A Series are full Gigabit unmanaged Ethernet Switches that provide easy to access, plug-n-play Gigabit ports for applications; a full Gigabit network provides higher throughput than legacy Fast Ethernet network. The cost effective IS-DG308-A Series unmanaged switches can be easily used in factory production line or embedded into machine system. The IS-DG308-A Series also support some useful function by default for network traffic optimization, such as QoS and storm protection.



Key features

- ▶ 8 / 6 Giga Copper ports with 0 / 2 100/1000 Based SFP ports.
- ▶ Support 9K Jumbo frames
- ▶ IEEE 802.3x flow control & back-pressure
- ▶ Layer 2 Line-Speed Switching Fabric, non-blocking
- ▶ Support IEEE 802.1p TOS/Diffserv, QoS by default
- ▶ Multicast / Broadcast / Flooding Storm Control
- ▶ Wide-temperature range (-40~75°C)
- ▶ AC Power Input 100/240 VAC, 50Hz ~ 60Hz
- ▶ Support DIN-Rail or wall mount installation
- ▶ IP 30 Protection
- ▶ 2 KV surge immunity on RJ45 Copper ports
- ▶ 1.5KV Hipot
- ▶ Rugged Fanless design

Specification

Ethernet

Operating Mode	Store and Forward, L2 wire-speed/non-blocking switching engine
MAC addresses	8K
Packet Buffer	4 Mbits
Jumbo frame	9K
Backplane / Switching Fabric	16Gbps

RJ45 Copper ports

Speed	10/100/1000 Mbps
MDI/MDIX Auto-crossover	Support straight or cross wired cables
Auto-negotiation/Duplex	10/100/1000 Mbps speed auto-negotiation; Full & Half Duplex
Ethernet Port Protection	1.5KV VRMS 1minute(Hipot), 2KV surge immunity on RJ45 Copper ports

Fiber Ports

Port Types supported	100/1000 Base SFP Slot
Fiber port connector	LC/RJ45 connector for fiber ports
Optimal fiber cable	Typical 50 or 62.5/125 μ m for multimode (mm) Typical 8 or 9/125 μ m for single mode (sm)

Protocols & Standards

IEEE 802.3, IEEE 802.3x, Flow Control, Back Pressure, ICMP, TCP/UDP

Smart Features

QoS	IEEE 802.1p, TOS/Diffserv
Number of Queue	4
Storm Protection	Multicast/Broadcast/Flooding Storm Control
Traffic Shaper	Port-Based Port Sharping

Power

Power Input	AC Power Input, IEC Connector
Input Voltage Range	100/240 VAC, 50Hz~60Hz
Power Consumption	IS-DG308-A 7.7 Watt, IS-DG308-2F-A 8.5 Watt

Indicators

Power status indication	Power Input status
Ethernet port indication	Link & speed


Environmental and Compliances

Operating Temperature	-40~75°C (Cold startup at -40°C)
Storage Temperature	-40~85°C
Humidity	5~95% (Non-Condensing)
Vibration, shock, free fall	IEC-60068-2-6, -27, -32
Certification Compliance	CE, FCC
Electrical safety	CE
EMC	FCC Part 15, CISPR 22 (EN55022) Class A IEC-61000-4-2, -3, -4, -5, -6 (Level 3)
RoHS & WEEE	RoHS (Pb free) and WEEE Compliant
MTBF	>25 years

Mechanical

Protection	IP30
Dimension	140mm(H) x 70mm (W) x 95.9mm (D) (without DIN rail clip)
Weight	900 g
Installation	DIN-Rail mounting; Wall mounting

Dimension Diagram

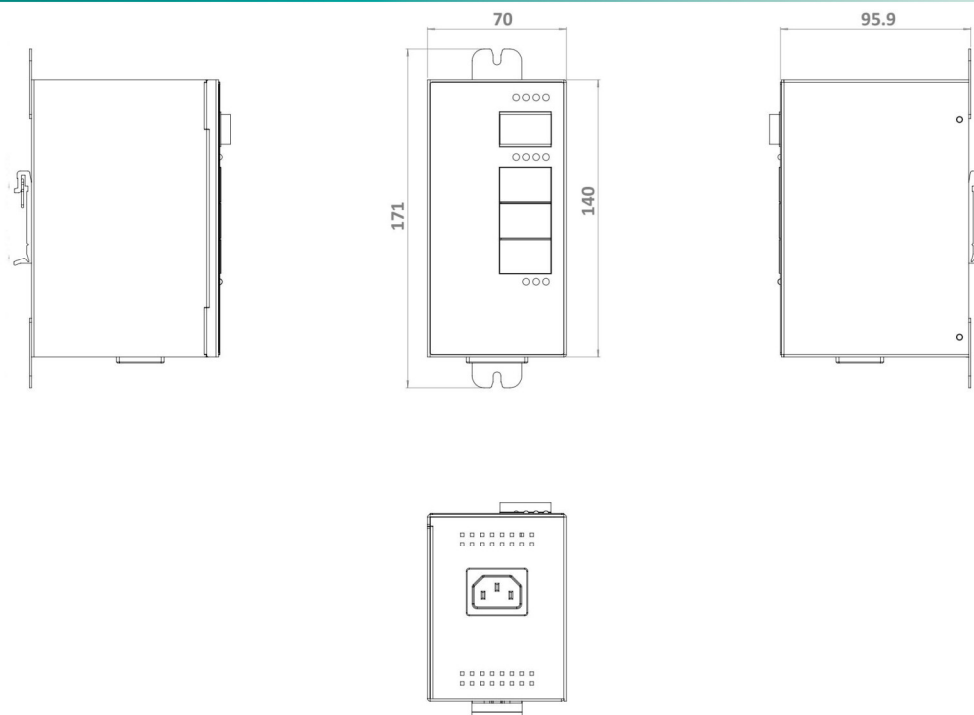

Ordering Information

Available Models	Description	10/100/1000Mb TX	100/1000Mb FX
IS-DG308-2F-A	Industrial 8 port Gigabit Layer 2 unmanaged Ethernet Switch, 2G SFP Slot	6	2
IS-DG308-A	Industrial 8 port Gigabit Layer 2 unmanaged Ethernet Switch	8	

Accessories

1. 100 Mb SFP Modules
2. Gigabit SFP Modules
3. IS-RK4U 19" rack mount kit

Package Checklist

- IS-DG308-A Switch
- Quick Installation Guide (Printed)
- Wall Mount kit / DIN-Rail kit